
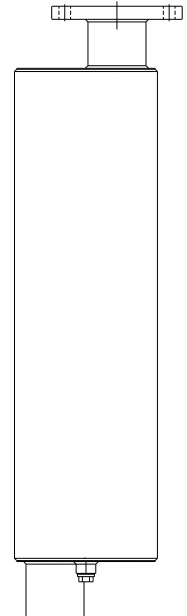


End of line liquid product Detonation Flame Arrester	: 1004-0002-70
EC design test certificate no.	: IBExU 09 ATEX 2100 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	:
Flange connection	: EN1092-1(DIN2576) PN10(16)
Thread connection	:
Weight	: ~ 18,5 kg

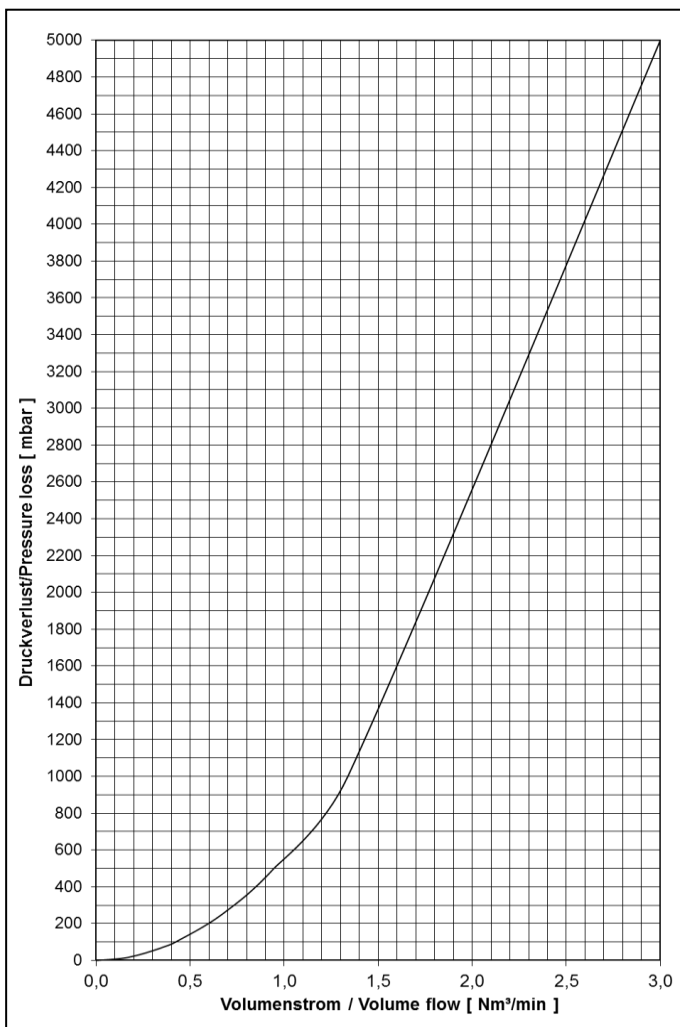

Material
Housing
 V4A/AISI 316 range

Operating Data
 Type : DET4
 Absolute pressure : $\leq 1,1$ bar
 Temperature : $\leq 60,0$ °C
 Nominal pipe size : $\leq$ DN50

Pressure loss
 Medium Water
 t = 15 °C, density = 1000 kg/m³