
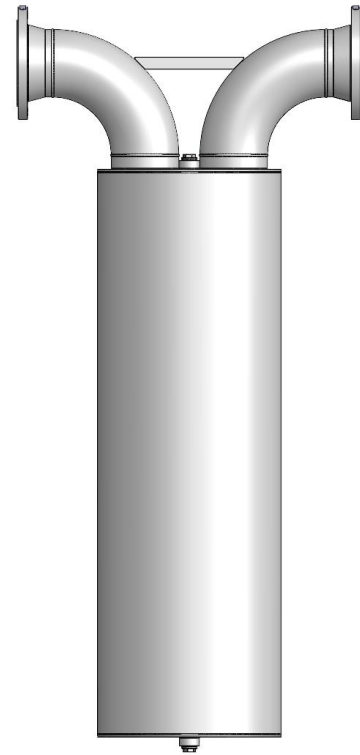


Inline Liquid Product Detonation Flame Arrester	: 1015-0001-10
EC design test certificate no.	: IBExU 21 ATEX 2108 X
Standard gap (MESG)	: $\geq 0,65$ mm
Explosion group	: Ex G IIB3
Operating direction	: Einseitig / One direction
Flange connection	: EN1092-1 Typ 11 Form B1 PN10/16
Weight	: ~ 147,0 kg

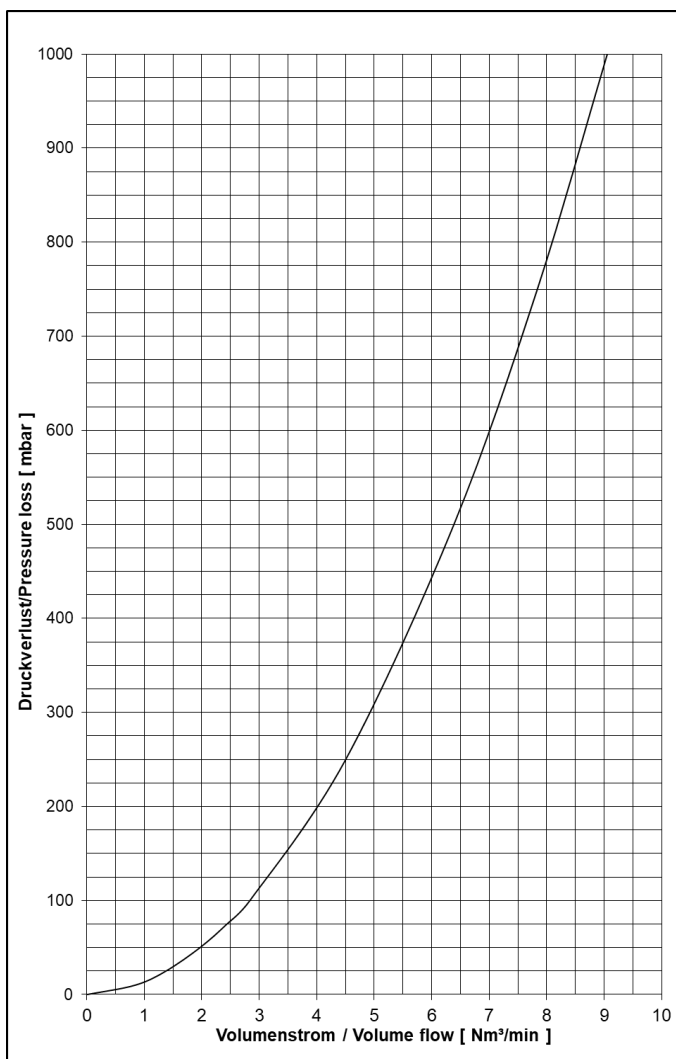

Material

Housing

Steel outside powder coated

Operating Data

Type	: DET4
Absolute pressure	: $\leq 1,1$ bar
Temperature	: $\leq 60,0$ °C
Nominal pipe size	: $\leq$ DN150

Pressure loss

Medium Water

t = 15 °C, density = 1000 kg/m³